

GRIDLUX +

LIGHTING SOLUTION

FEATURES

- Easy Installation designed to be fitted to any new or existing 24 mm face finish ceiling grid system.
- Energy-saving LED technology
- Anodised and powder-coated aluminium extrusion body, steel mounting clips.
- IES files available on request
- SDoc available

V1.0 03/24



PHONIC
ACOUSTIC CEILING TILES



600 mm Black/White casing-milky diffuser




Wattage:	30 W
Globe type:	Lumileds LED chip
Lumens:	2550 lm
Colour temperature:	3000k, 4000k & 6000K in one fitting. Colour selected by dip switch
Ra:	80
Voltage:	220 – 240V /PF>0.9
Driver:	600 mA & 700 mA CC driver + 1M AU plug
Dimmable:	Yes
Beam Angle:	76°

1200 mm Black/White casing-milky diffuser



Wattage:	45 W
Globe type:	Lumileds LED chip
Lumens:	3000 lm
Colour temperature:	3000k, 4000k & 6000K in one fitting. Colour selected by dip switch
Ra:	80
Voltage:	220 – 240V /PF>0.9
Driver:	1050 mA & 1100 mA CC driver + 1M AU plug
Dimmable:	Yes
Beam Angle:	76°
	Up to 85 lm per W
	Flicker free

Dimmer specifications

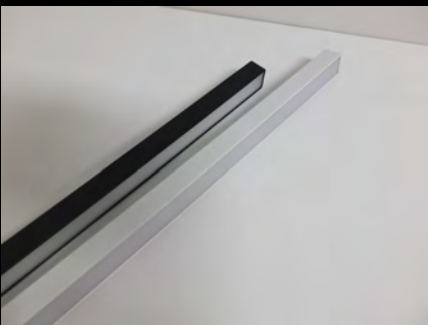

Model No.	AA0300
Max. current:	50 mA
Power supply:	DC 1-10V
Dimension:	24 x 24 x 25
Operating mode:	Rotary
Operating environment:	Temperature: 0-15°C Humidity: 10% R.H. -90% R.H.
Size:	23.7 mm x 23.7 mm x 60 mm (LxWxH)
Support:	To adjust the lowest brightness level Overload and overtemperature protection Low standby power consumption 1-way control

*

3000K = Warm light
4000K = Bright light
5000-6000K = Daylight

Warranty

5 Year product warranty when installed in accordance with NZ1170.5

NZ Building Code

Exceeds clause B2 - durability, 5 years